



Diffused soft light in a beautiful design

Concord Colossal

Concord Colossal is Sylvania's new round shaped luminaire range elevating lighting to the next level. It combines the purest modern appearance with the latest highly efficient lighting technology. The composition of the slightly curved slim aluminum ring and the full flat homogenous diffuser provides perfect lighting experience in all interior office and decorative applications.

This wide-area luminaire family with minimalist and elegant style is designed to complement any interior area whether it is surface mounted or a pendant.

The wide variety of dimensions and the optional light distributions can give a choice to create unique light installations. The similar round shape in four different dimensions means that the Colossal can be positioned at random and in any direction in a room without compromising the constant quality of light.

The opal diffuser is for general lighting with maximum transmittance efficacy and homogeneous lighting. The micro-prismatic diffuser with reduced glare is optimized for offices and any other workplaces.


All dimensions are available with integrated emergency lighting and are SylSmart Connected and SylSmart Standalone enabled.

Using the height-adjustable suspension kit even the biggest sizes can be mounted by one user. Thanks to its design the new Colossal delivers soft extremely homogeneous glare-free efficient and uniform illumination in all environments.

The beauty of **light**

Concord Colossal

Ceiling surface, wall and suspended



Features

- Round shape luminaire with combination of aluminium ring and plastic diffuser for surface wall or pendant installation
- Wide-area decorative luminaire for offices retail and hospitality applications with uniform and homogenous light distribution
- Optional direct and direct / indirect (halo) light distribution
- 2 diffuser options: opal PC or prismatic PMMA diffuser
- 4 dimensions from 400 up to 1200mm
- Range of luminous flux from 1650 up to 22175lm with efficacy up to 144lm/W
- Luminance at 65° < 3000 cd/m²
- Prismatic version is ideal for office areas (UGR ≤ 19) and environments with computer screens in accordance with EN 12464-1
- Can be fitted as pendant luminaire using additional ceiling rose and suspension cable kit for 400&600mm versions
- Indirect light distribution through satin PC diffuser provides halo effect for ceiling and wall illumination, up to 4% of total luminous flux
- Available with warm (3000K) and neutral white (4000K) colour temperature with CRI80 and CRI90 (only 4000K)
- LED Colour consistency (initial MacAdam) between luminaries ≤ 3 SDCM
- DALI dimmable SylSmart Connected and Standalone enabled options
- IP40 ingress protection level from the front surface
- IK07 impact resistance level
- Electrical safety class I (EN 61140)
- 3hrs emergency available for all dimensions
- Powder coated white finishing (RAL9016) colour as standard
- One type of ceiling rose for all dimensions to be ordered as a separate accessory
- Built-in suspension cable for 900&1200mm versions suspension kit as a separate accessory for 400 & 600mm versions
- Reported lifetime 66k hours L90B10



Concord Colossal 400

Ceiling surface, wall and suspended



Product information

Code	Description	Fixture Power (W)	Luminous Flux (lm)	Efficacy (lm/W)	Colour Temp (K)	CRI	Dimmable	Control Technology	UGR
Concord Colossal 400mm									
Opal diffuser Direct light distribution									
CRI80 Warm white (3000K)									
2071101	COLOSSAL 400mm 830 OPAL DIR WHITE	21.0	2460	117	3000	>80	-	-	23
2071102	COLOSSAL 400mm 830 OPAL DIR WHITE EM	22.0	2460	112	3000	>80	-	-	23
2071103	COLOSSAL 400mm 830 OPAL DIR WHITE DALI	20.7	2460	119	3000	>80	Yes	DALI	23
2071104	COLOSSAL 400mm 830 OPAL DIR WHITE DALI EM	21.7	2460	113	3000	>80	Yes	DALI	23
2071105	COLOSSAL 400mm 830 OPAL DIR WHITE SSC	20.5	2460	120	3000	>80	Yes	SylSmart Standalone	23
CRI80 Neutral white (4000K)									
2071111	COLOSSAL 400mm 840 OPAL DIR WHITE	21.0	2580	123	4000	>80	-	-	23
2071112	COLOSSAL 400mm 840 OPAL DIR WHITE EM	22.0	2580	117	4000	>80	-	-	23
2071113	COLOSSAL 400mm 840 OPAL DIR WHITE DALI	20.7	2580	125	4000	>80	Yes	DALI	23
2071114	COLOSSAL 400mm 840 OPAL DIR WHITE DALI EM	21.7	2580	119	4000	>80	Yes	DALI	23
2071115	COLOSSAL 400mm 840 OPAL DIR WHITE SSC	20.5	2580	126	4000	>80	Yes	SylSmart Standalone	23
2071329	COLOSSAL 400mm HO 840 OPAL DIR WHITE	27.0	3435	127	4000	>80	-	-	24
2071330	COLOSSAL 400mm HO 840 OPAL DIR WHITE EM	27.9	3435	123	4000	>80	-	-	24
2071331	COLOSSAL 400mm HO 840 OPAL DIR WHITE DALI	27.0	3435	127	4000	>80	Yes	DALI	24
2071332	COLOSSAL 400mm HO 840 OPAL DIR WHITE DALI EM	27.9	3435	123	4000	>80	Yes	DALI	24
CRI90 Neutral white (4000K)									
2071121	COLOSSAL 400mm 940 OPAL DIR WHITE	21.0	2200	105	4000	>90	-	-	22
2071122	COLOSSAL 400mm 940 OPAL DIR WHITE EM	22.0	2200	100	4000	>90	-	-	22
2071123	COLOSSAL 400mm 940 OPAL DIR WHITE DALI	20.7	2200	106	4000	>90	Yes	DALI	22
2071124	COLOSSAL 400mm 940 OPAL DIR WHITE DALI EM	21.7	2200	101	4000	>90	Yes	DALI	22
2071125	COLOSSAL 400mm 940 OPAL DIR WHITE SSC	20.5	2200	107	4000	>90	Yes	SylSmart Standalone	22
Opal diffuser, Direct+Halo light distribution									
CRI80 Warm white (3000K)									
2071131	COLOSSAL 400mm 830 OPAL DIR+HAL WHITE	21.0	2550	121	3000	>80	-	-	23
2071132	COLOSSAL 400mm 830 OPAL DIR+HAL WHITE EM	22.0	2550	116	3000	>80	-	-	23
2071133	COLOSSAL 400mm 830 OPAL DIR+HAL WHITE DALI	20.7	2550	123	3000	>80	Yes	DALI	23
2071134	COLOSSAL 400mm 830 OPAL DIR+HAL WHITE DALI EM	21.7	2550	118	3000	>80	Yes	DALI	23
2071135	COLOSSAL 400mm 830 OPAL DIR+HAL WHITE SSC	20.5	2550	124	3000	>80	Yes	SylSmart Standalone	23
CRI80 Neutral white (4000K)									
2071141	COLOSSAL 400mm 840 OPAL DIR+HAL WHITE	21.0	2680	128	4000	>80	-	-	23
2071142	COLOSSAL 400mm 840 OPAL DIR+HAL WHITE EM	22.0	2680	122	4000	>80	-	-	23
2071143	COLOSSAL 400mm 840 OPAL DIR+HAL WHITE DALI	20.7	2680	129	4000	>80	Yes	DALI	23
2071144	COLOSSAL 400mm 840 OPAL DIR+HAL WHITE DALI EM	21.7	2680	124	4000	>80	Yes	DALI	23
2071145	COLOSSAL 400mm 840 OPAL DIR+HAL WHITE SSC	20.5	2680	131	4000	>80	Yes	SylSmart Standalone	23
2071333	COLOSSAL 400mm HO 840 OPAL DIR+HAL WHITE	27.0	3560	132	4000	>80	-	-	24
2071334	COLOSSAL 400mm HO 840 OPAL DIR+HAL WHITE EM	27.9	3560	128	4000	>80	-	-	24
2071335	COLOSSAL 400mm HO 840 OPAL DIR+HAL WHITE DALI	27.0	3560	132	4000	>80	Yes	DALI	24
2071336	COLOSSAL 400mm HO 840 OPAL DIR+HAL WHITE DALI EM	27.9	3560	128	4000	>80	Yes	DALI	24
CRI90 Neutral white (4000K)									
2071151	COLOSSAL 400mm 940 OPAL DIR+HAL WHITE	21.0	2280	109	4000	>90	-	-	22
2071152	COLOSSAL 400mm 940 OPAL DIR+HAL WHITE EM	22.0	2280	104	4000	>90	-	-	22
2071153	COLOSSAL 400mm 940 OPAL DIR+HAL WHITE DALI	20.7	2280	110	4000	>90	Yes	DALI	22
2071154	COLOSSAL 400mm 940 OPAL DIR+HAL WHITE DALI EM	21.7	2280	105	4000	>90	Yes	DALI	22
2071155	COLOSSAL 400mm 940 OPAL DIR+HAL WHITE SSC	20.5	2280	111	4000	>90	Yes	SylSmart Standalone	22

Concord Colossal 400

Ceiling surface, wall and suspended



Product information

Code	Description	Fixture Power (W)	Luminous Flux (lm)	Efficacy (lm/W)	Colour Temp (K)	CRI	Dimmable	Control Technology	UGR
Concord Colossal 400mm									
Prismatic diffuser Direct light distribution									
CRI80 Warm white (3000K)									
2071106	COLOSSAL 400mm 830 PRISM DIR WHITE	16.0	1845	115	3000	>80	-	-	19
2071107	COLOSSAL 400mm 830 PRISM DIR WHITE EM	17.2	1845	107	3000	>80	-	-	19
2071108	COLOSSAL 400mm 830 PRISM DIR WHITE DALI	16.0	1845	115	3000	>80	Yes	DALI	19
2071109	COLOSSAL 400mm 830 PRISM DIR WHITE DALI EM	17.0	1845	109	3000	>80	Yes	DALI	19
2071110	COLOSSAL 400mm 830 PRISM DIR WHITE SSC	15.9	1845	116	3000	>80	Yes	SylSmart Standalone	19
CRI80 Neutral white (4000K)									
2071116	COLOSSAL 400mm 840 PRISM DIR WHITE	16.0	1935	121	4000	>80	-	-	19
2071117	COLOSSAL 400mm 840 PRISM DIR WHITE EM	17.2	1935	113	4000	>80	-	-	19
2071118	COLOSSAL 400mm 840 PRISM DIR WHITE DALI	16.0	1935	121	4000	>80	Yes	DALI	19
2071119	COLOSSAL 400mm 840 PRISM DIR WHITE DALI EM	17.0	1935	114	4000	>80	Yes	DALI	19
2071120	COLOSSAL 400mm 840 PRISM DIR WHITE SSC	15.9	1935	122	4000	>80	Yes	SylSmart Standalone	19
CRI90 Neutral white (4000K)									
2071126	COLOSSAL 400mm 940 PRISM DIR WHITE	16.0	1650	103	4000	>90	-	-	19
2071127	COLOSSAL 400mm 940 PRISM DIR WHITE EM	17.2	1650	96	4000	>90	-	-	19
2071128	COLOSSAL 400mm 940 PRISM DIR WHITE DALI	16.0	1650	103	4000	>90	Yes	DALI	19
2071129	COLOSSAL 400mm 940 PRISM DIR WHITE DALI EM	17.0	1650	97	4000	>90	Yes	DALI	19
2071130	COLOSSAL 400mm 940 PRISM DIR WHITE SSC	15.9	1650	104	4000	>90	Yes	SylSmart Standalone	19
Prismatic diffuser, Direct+Halo light distribution									
CRI80 Warm white (3000K)									
2071136	COLOSSAL 400mm 830 PRISM DIR+HAL WHITE	16.0	1920	120	3000	>80	-	-	19
2071137	COLOSSAL 400mm 830 PRISM DIR+HAL WHITE EM	17.2	1920	112	3000	>80	-	-	19
2071138	COLOSSAL 400mm 830 PRISM DIR+HAL WHITE DALI	16.0	1920	120	3000	>80	Yes	DALI	19
2071139	COLOSSAL 400mm 830 PRISM DIR+HAL WHITE DALI EM	17.0	1920	113	3000	>80	Yes	DALI	19
2071140	COLOSSAL 400mm 830 PRISM DIR+HAL WHITE SSC	15.9	1920	121	3000	>80	Yes	SylSmart Standalone	19
CRI80 Neutral white (4000K)									
2071146	COLOSSAL 400mm 840 PRISM DIR+HAL WHITE	16.0	2015	126	4000	>80	-	-	19
2071147	COLOSSAL 400mm 840 PRISM DIR+HAL WHITE EM	17.0	2015	119	4000	>80	-	-	19
2071148	COLOSSAL 400mm 840 PRISM DIR+HAL WHITE DALI	16.0	2015	126	4000	>80	Yes	DALI	19
2071149	COLOSSAL 400mm 840 PRISM DIR+HAL WHITE DALI EM	17.0	2015	119	4000	>80	Yes	DALI	19
2071150	COLOSSAL 400mm 840 PRISM DIR+HAL WHITE SSC	15.9	2015	127	4000	>80	Yes	SylSmart Standalone	19
CRI90 Neutral white (4000K)									
2071156	COLOSSAL 400mm 940 PRISM DIR+HAL WHITE	16.0	1715	107	4000	>90	-	-	19
2071157	COLOSSAL 400mm 940 PRISM DIR+HAL WHITE EM	17.2	1715	100	4000	>90	-	-	19
2071158	COLOSSAL 400mm 940 PRISM DIR+HAL WHITE DALI	16.0	1715	107	4000	>90	Yes	DALI	19
2071159	COLOSSAL 400mm 940 PRISM DIR+HAL WHITE DALI EM	17.0	1715	101	4000	>90	Yes	DALI	19
2071160	COLOSSAL 400mm 940 PRISM DIR+HAL WHITE SSC	15.9	1715	108	4000	>90	Yes	SylSmart Standalone	19

Additional Images



Colossal 400mm Direct



Colossal 400mm Halo



Colossal 600mm Direct



Colossal 600mm Halo

Concord Colossal 600

Ceiling surface, wall and suspended



Product information

Code	Description	Fixture Power (W)	Luminous Flux (lm)	Efficacy (lm/W)	Colour Temp (K)	CRI	Dimmable	Control Technology	UGR
Concord Colossal 600mm									
Opal diffuser Direct light distribution									
CRI80 Warm white (3000K)									
2071161	COLOSSAL 600mm 830 OPAL DIR WHITE	40.6	5075	125	3000	>80	-	-	22
2071162	COLOSSAL 600mm 830 OPAL DIR WHITE EM	41.5	5075	122	3000	>80	-	-	22
2071163	COLOSSAL 600mm 830 OPAL DIR WHITE DALI	40.1	5075	127	3000	>80	Yes	DALI	22
2071164	COLOSSAL 600mm 830 OPAL DIR WHITE DALI EM	42.0	5075	121	3000	>80	Yes	DALI	22
2071165	COLOSSAL 600mm 830 OPAL DIR WHITE SSA	39.7	5075	128	3000	>80	Yes	SylSmart Connected	22
2071166	COLOSSAL 600mm 830 OPAL DIR WHITE SSC	40.1	5075	127	3000	>80	Yes	SylSmart Standalone	22
CRI80 Neutral white (4000K)									
2071173	COLOSSAL 600mm 840 OPAL DIR WHITE	40.6	5330	131	4000	>80	-	-	23
2071174	COLOSSAL 600mm 840 OPAL DIR WHITE EM	41.5	5330	128	4000	>80	-	-	23
2071175	COLOSSAL 600mm 840 OPAL DIR WHITE DALI	40.1	5330	133	4000	>80	Yes	DALI	23
2071176	COLOSSAL 600mm 840 OPAL DIR WHITE DALI EM	42.0	5330	127	4000	>80	Yes	DALI	23
2071177	COLOSSAL 600mm 840 OPAL DIR WHITE SSA	39.7	5330	134	4000	>80	Yes	SylSmart Connected	23
2071178	COLOSSAL 600mm 840 OPAL DIR WHITE SSC	40.1	5330	133	4000	>80	Yes	SylSmart Standalone	23
CRI90 Neutral white (4000K)									
2071185	COLOSSAL 600mm 940 OPAL DIR WHITE	40.6	4535	112	4000	>90	-	-	22
2071186	COLOSSAL 600mm 940 OPAL DIR WHITE EM	41.5	4535	109	4000	>90	-	-	22
2071187	COLOSSAL 600mm 940 OPAL DIR WHITE DALI	40.1	4535	113	4000	>90	Yes	DALI	22
2071188	COLOSSAL 600mm 940 OPAL DIR WHITE DALI EM	41.0	4535	111	4000	>90	Yes	DALI	22
2071189	COLOSSAL 600mm 940 OPAL DIR WHITE SSA	39.7	4535	114	4000	>90	Yes	SylSmart Connected	22
2071190	COLOSSAL 600mm 940 OPAL DIR WHITE SSC	40.1	4535	113	4000	>90	Yes	SylSmart Standalone	22
Opal diffuser, Direct+Halo light distribution									
CRI80 Warm white (3000K)									
2071197	COLOSSAL 600mm 830 OPAL DIR+HAL WHITE	40.6	5190	128	3000	>80	-	-	22
2071198	COLOSSAL 600mm 830 OPAL DIR+HAL WHITE EM	41.5	5190	125	3000	>80	-	-	22
2071199	COLOSSAL 600mm 830 OPAL DIR+HAL WHITE DALI	40.1	5190	129	3000	>80	Yes	DALI	22
2071200	COLOSSAL 600mm 830 OPAL DIR+HAL WHITE DALI EM	42.0	5190	124	3000	>80	Yes	DALI	22
2071201	COLOSSAL 600mm 830 OPAL DIR+HAL WHITE SSA	39.7	5190	131	3000	>80	Yes	SylSmart Connected	22
2071202	COLOSSAL 600mm 830 OPAL DIR+HAL WHITE SSC	40.1	5190	129	3000	>80	Yes	SylSmart Standalone	22
CRI80 Neutral white (4000K)									
2071209	COLOSSAL 600mm 840 OPAL DIR+HAL WHITE	40.6	5445	134	4000	>80	-	-	23
2071210	COLOSSAL 600mm 840 OPAL DIR+HAL WHITE EM	41.5	5445	131	4000	>80	-	-	23
2071211	COLOSSAL 600mm 840 OPAL DIR+HAL WHITE DALI	40.1	5445	136	4000	>80	Yes	DALI	23
2071212	COLOSSAL 600mm 840 OPAL DIR+HAL WHITE DALI EM	42.0	5445	130	4000	>80	Yes	DALI	23
2071213	COLOSSAL 600mm 840 OPAL DIR+HAL WHITE SSA	39.7	5445	137	4000	>80	Yes	SylSmart Connected	23
2071214	COLOSSAL 600mm 840 OPAL DIR+HAL WHITE SSC	40.1	5445	136	4000	>80	Yes	SylSmart Standalone	23
CRI90 Neutral white (4000K)									
2071221	COLOSSAL 600mm 940 OPAL DIR+HAL WHITE	40.6	4635	114	4000	>90	-	-	22
2071222	COLOSSAL 600mm 940 OPAL DIR+HAL WHITE EM	41.5	4635	112	4000	>90	-	-	22
2071223	COLOSSAL 600mm 940 OPAL DIR+HAL WHITE DALI	40.1	4635	116	4000	>90	Yes	DALI	22
2071224	COLOSSAL 600mm 940 OPAL DIR+HAL WHITE DALI EM	41.0	4635	113	4000	>90	Yes	DALI	22
2071225	COLOSSAL 600mm 940 OPAL DIR+HAL WHITE SSA	39.7	4635	117	4000	>90	Yes	SylSmart Connected	22
2071226	COLOSSAL 600mm 940 OPAL DIR+HAL WHITE SSC	40.1	4635	116	4000	>90	Yes	SylSmart Standalone	22

Concord Colossal 600

Ceiling surface, wall and suspended



Product information

Code	Description	Fixture Power (W)	Luminous Flux (lm)	Efficacy (lm/W)	Colour Temp (K)	CRI	Dimmable	Control Technology	UGR
Concord Colossal 600mm									
Prismatic diffuser, Direct light distribution									
CRI80 Warm white (3000K)									
2071167	COLOSSAL 600mm 830 PRISM DIR WHITE	31.3	3805	122	3000	>80	-	-	19
2071168	COLOSSAL 600mm 830 PRISM DIR WHITE EM	32.1	3805	119	3000	>80	-	-	19
2071169	COLOSSAL 600mm 830 PRISM DIR WHITE DALI	31.3	3805	122	3000	>80	Yes	DALI	19
2071170	COLOSSAL 600mm 830 PRISM DIR WHITE DALI EM	32.8	3805	116	3000	>80	Yes	DALI	19
2071171	COLOSSAL 600mm 830 PRISM DIR WHITE SSA	30.7	3805	124	3000	>80	Yes	SylSmart Connected	19
2071172	COLOSSAL 600mm 830 PRISM DIR WHITE SSC	31.3	3805	122	3000	>80	Yes	SylSmart Standalone	19
CRI80 Neutral white (4000K)									
2071179	COLOSSAL 600mm 840 PRISM DIR WHITE	31.3	3995	128	4000	>80	-	-	19
2071180	COLOSSAL 600mm 840 PRISM DIR WHITE EM	32.1	3995	124	4000	>80	-	-	19
2071181	COLOSSAL 600mm 840 PRISM DIR WHITE DALI	31.3	3995	128	4000	>80	Yes	DALI	19
2071182	COLOSSAL 600mm 840 PRISM DIR WHITE DALI EM	32.8	3995	122	4000	>80	Yes	DALI	19
2071183	COLOSSAL 600mm 840 PRISM DIR WHITE SSA	30.7	3995	130	4000	>80	Yes	SylSmart Connected	19
2071184	COLOSSAL 600mm 840 PRISM DIR WHITE SSC	31.3	3995	128	4000	>80	Yes	SylSmart Standalone	19
CRI90 Neutral white (4000K)									
2071191	COLOSSAL 600mm 940 PRISM DIR WHITE	31.3	3400	109	4000	>90	-	-	19
2071192	COLOSSAL 600mm 940 PRISM DIR WHITE EM	32.1	3400	106	4000	>90	-	-	19
2071193	COLOSSAL 600mm 940 PRISM DIR WHITE DALI	31.3	3400	109	4000	>90	Yes	DALI	19
2071194	COLOSSAL 600mm 940 PRISM DIR WHITE DALI EM	32.8	3400	104	4000	>90	Yes	DALI	19
2071195	COLOSSAL 600mm 940 PRISM DIR WHITE SSA	30.7	3400	111	4000	>90	Yes	SylSmart Connected	19
2071196	COLOSSAL 600mm 940 PRISM DIR WHITE SSC	31.3	3400	109	4000	>90	Yes	SylSmart Standalone	19
Prismatic diffuser, Direct+Halo light distribution									
CRI80 Warm white (3000K)									
2071203	COLOSSAL 600mm 830 PRISM DIR+HAL WHITE	31.3	3900	125	3000	>80	-	-	19
2071204	COLOSSAL 600mm 830 PRISM DIR+HAL WHITE EM	32.1	3900	121	3000	>80	-	-	19
2071205	COLOSSAL 600mm 830 PRISM DIR+HAL WHITE DALI	31.3	3900	125	3000	>80	Yes	DALI	19
2071206	COLOSSAL 600mm 830 PRISM DIR+HAL WHITE DALI EM	32.8	3900	119	3000	>80	Yes	DALI	19
2071207	COLOSSAL 600mm 830 PRISM DIR+HAL WHITE SSA	30.7	3900	127	3000	>80	Yes	SylSmart Connected	19
2071208	COLOSSAL 600mm 830 PRISM DIR+HAL WHITE SSC	31.3	3900	125	3000	>80	Yes	SylSmart Standalone	19
CRI80 Neutral white (4000K)									
2071215	COLOSSAL 600mm 840 PRISM DIR+HAL WHITE	31.3	4090	131	4000	>80	-	-	19
2071216	COLOSSAL 600mm 840 PRISM DIR+HAL WHITE EM	32.1	4090	127	4000	>80	-	-	19
2071217	COLOSSAL 600mm 840 PRISM DIR+HAL WHITE DALI	31.3	4090	131	4000	>80	Yes	DALI	19
2071218	COLOSSAL 600mm 840 PRISM DIR+HAL WHITE DALI EM	32.1	4090	127	4000	>80	Yes	DALI	19
2071219	COLOSSAL 600mm 840 PRISM DIR+HAL WHITE SSA	30.7	4090	133	4000	>80	Yes	SylSmart Connected	19
2071220	COLOSSAL 600mm 840 PRISM DIR+HAL WHITE SSC	31.3	4090	131	4000	>80	Yes	SylSmart Standalone	19
CRI90 Neutral white (4000K)									
2071227	COLOSSAL 600mm 940 PRISM DIR+HAL WHITE	31.3	3485	111	4000	>90	-	-	19
2071228	COLOSSAL 600mm 940 PRISM DIR+HAL WHITE EM	32.1	3485	109	4000	>90	-	-	19
2071229	COLOSSAL 600mm 940 PRISM DIR+HAL WHITE DALI	31.3	3485	111	4000	>90	Yes	DALI	19
2071230	COLOSSAL 600mm 940 PRISM DIR+HAL WHITE DALI EM	32.8	3485	106	4000	>90	Yes	DALI	19
2071231	COLOSSAL 600mm 940 PRISM DIR+HAL WHITE SSA	30.7	3485	114	4000	>90	Yes	SylSmart Connected	19
2071232	COLOSSAL 600mm 940 PRISM DIR+HAL WHITE SSC	31.3	3485	111	4000	>90	Yes	SylSmart Standalone	19

Concord Colossal 900

Ceiling surface and suspended




Product information

Code	Description	Fixture Power (W)	Luminous Flux (lm)	Efficacy (lm/W)	Colour Temp (K)	CRI	Dimmable	Control Technology	UGR
Concord Colossal 900mm									
Opal diffuser Direct light distribution									
CRI80 Warm white (3000K)									
2071233	COLOSSAL 900mm 830 OPAL DIR WHITE DALI	76.8	10,375	135	3000	>80	Yes	DALI	22
2071234	COLOSSAL 900mm 830 OPAL DIR WHITE DALI EM	77.6	10,375	134	3000	>80	Yes	DALI	22
2071235	COLOSSAL 900mm 830 OPAL DIR WHITE SSA	76.8	10,375	135	3000	>80	Yes	SylSmart Connected	22
2071236	COLOSSAL 900mm 830 OPAL DIR WHITE SSC	76.8	10,375	135	3000	>80	Yes	SylSmart Standalone	22
CRI80 Neutral white (4000K)									
2071241	COLOSSAL 900mm 840 OPAL DIR WHITE DALI	76.8	10,890	142	4000	>80	Yes	DALI	22
2071242	COLOSSAL 900mm 840 OPAL DIR WHITE DALI EM	77.6	10,890	140	4000	>80	Yes	DALI	22
2071243	COLOSSAL 900mm 840 OPAL DIR WHITE SSA	76.8	10,890	142	4000	>80	Yes	SylSmart Connected	22
2071244	COLOSSAL 900mm 840 OPAL DIR WHITE SSC	76.8	10,890	142	4000	>80	Yes	SylSmart Standalone	22
CRI90 Neutral white (4000K)									
2071249	COLOSSAL 900mm 940 OPAL DIR WHITE DALI	76.8	9275	121	4000	>90	Yes	DALI	22
2071250	COLOSSAL 900mm 940 OPAL DIR WHITE DALI EM	77.6	9275	120	4000	>90	Yes	DALI	22
2071251	COLOSSAL 900mm 940 OPAL DIR WHITE SSA	76.8	9275	121	4000	>90	Yes	SylSmart Connected	22
2071252	COLOSSAL 900mm 940 OPAL DIR WHITE SSC	76.8	9275	121	4000	>90	Yes	SylSmart Standalone	22
Opal diffuser, Direct+Halo light distribution									
CRI80 Warm white (3000K)									
2071257	COLOSSAL 900mm 830 OPAL DIR+HAL WHITE DALI	76.8	10,505	137	3000	>80	Yes	DALI	22
2071258	COLOSSAL 900mm 830 OPAL DIR+HAL WHITE DALI EM	77.6	10,505	135	3000	>80	Yes	DALI	22
2071259	COLOSSAL 900mm 830 OPAL DIR+HAL WHITE SSA	76.8	10,505	137	3000	>80	Yes	SylSmart Connected	22
2071260	COLOSSAL 900mm 830 OPAL DIR+HAL WHITE SSC	76.8	10,505	137	3000	>80	Yes	SylSmart Standalone	22
CRI80 Neutral white (4000K)									
2071265	COLOSSAL 900mm 840 OPAL DIR+HAL WHITE DALI	76.8	11,025	144	4000	>80	Yes	DALI	22
2071266	COLOSSAL 900mm 840 OPAL DIR+HAL WHITE DALI EM	77.6	11,025	142	4000	>80	Yes	DALI	22
2071267	COLOSSAL 900mm 840 OPAL DIR+HAL WHITE SSA	76.8	11,025	144	4000	>80	Yes	SylSmart Connected	22
2071268	COLOSSAL 900mm 840 OPAL DIR+HAL WHITE SSC	76.8	11,025	144	4000	>80	Yes	SylSmart Standalone	22
CRI90 Neutral white (4000K)									
2071273	COLOSSAL 900mm 940 OPAL DIR+HAL WHITE DALI	76.8	9390	122	4000	>90	Yes	DALI	22
2071274	COLOSSAL 900mm 940 OPAL DIR+HAL WHITE DALI EM	77.6	9390	121	4000	>90	Yes	DALI	22
2071275	COLOSSAL 900mm 940 OPAL DIR+HAL WHITE SSA	76.8	9390	122	4000	>90	Yes	SylSmart Connected	22
2071276	COLOSSAL 900mm 940 OPAL DIR+HAL WHITE SSC	76.8	9390	122	4000	>90	Yes	SylSmart Standalone	22



Concord Colossal 900

Ceiling surface and suspended



Product information

Code	Description	Fixture Power (W)	Luminous Flux (lm)	Efficacy (lm/W)	Colour Temp (K)	CRI	Dimmable	Control Technology	UGR
Concord Colossal 900mm									
Prismatic diffuser, Direct light distribution									
CRI80 Warm white (3000K)									
2071237	COLOSSAL 900mm 830 PRISM DIR WHITE DALI	58.7	7785	133	3000	>80	Yes	DALI	19
2071238	COLOSSAL 900mm 830 PRISM DIR WHITE DALI EM	59.4	7785	131	3000	>80	Yes	DALI	19
2071239	COLOSSAL 900mm 830 PRISM DIR WHITE SSA	59.4	7785	131	3000	>80	Yes	SylSmart Connected	19
2071240	COLOSSAL 900mm 830 PRISM DIR WHITE SSC	58.7	7785	133	3000	>80	Yes	SylSmart Standalone	19
CRI80 Neutral white (4000K)									
2071245	COLOSSAL 900mm 840 PRISM DIR WHITE DALI	58.7	8170	139	4000	>80	Yes	DALI	19
2071246	COLOSSAL 900mm 840 PRISM DIR WHITE DALI EM	59.4	8170	138	4000	>80	Yes	DALI	19
2071247	COLOSSAL 900mm 840 PRISM DIR WHITE SSA	59.4	8170	138	4000	>80	Yes	SylSmart Connected	19
2071248	COLOSSAL 900mm 840 PRISM DIR WHITE SSC	58.7	8170	139	4000	>80	Yes	SylSmart Standalone	19
CRI90 Neutral white (4000K)									
2071253	COLOSSAL 900mm 940 PRISM DIR WHITE DALI	58.7	6955	118	4000	>90	Yes	DALI	19
2071254	COLOSSAL 900mm 940 PRISM DIR WHITE DALI EM	59.4	6955	117	4000	>90	Yes	DALI	19
2071255	COLOSSAL 900mm 940 PRISM DIR WHITE SSA	59.4	6955	117	4000	>90	Yes	SylSmart Connected	19
2071256	COLOSSAL 900mm 940 PRISM DIR WHITE SSC	58.7	6955	118	4000	>90	Yes	SylSmart Standalone	19
Prismatic diffuser, Direct+Halo light distribution									
CRI80 Warm white (3000K)									
2071261	COLOSSAL 900mm 830 PRISM DIR+HAL WHITE DALI	58.7	7895	134	3000	>80	Yes	DALI	19
2071262	COLOSSAL 900mm 830 PRISM DIR+HAL WHITE DALI EM	59.4	7895	133	3000	>80	Yes	DALI	19
2071263	COLOSSAL 900mm 830 PRISM DIR+HAL WHITE SSA	59.4	7895	133	3000	>80	Yes	SylSmart Connected	19
2071264	COLOSSAL 900mm 830 PRISM DIR+HAL WHITE SSC	58.7	7895	134	3000	>80	Yes	SylSmart Standalone	19
CRI80 Neutral white (4000K)									
2071269	COLOSSAL 900mm 840 PRISM DIR+HAL WHITE DALI	58.7	8285	141	4000	>80	Yes	DALI	19
2071270	COLOSSAL 900mm 840 PRISM DIR+HAL WHITE DALI EM	59.4	8285	139	4000	>80	Yes	DALI	19
2071271	COLOSSAL 900mm 840 PRISM DIR+HAL WHITE SSA	59.4	8285	139	4000	>80	Yes	SylSmart Connected	19
2071272	COLOSSAL 900mm 840 PRISM DIR+HAL WHITE SSC	58.7	8285	141	4000	>80	Yes	SylSmart Standalone	19
CRI90 Neutral white (4000K)									
2071277	COLOSSAL 900mm 940 PRISM DIR+HAL WHITE DALI	58.7	7055	120	4000	>90	Yes	DALI	19
2071278	COLOSSAL 900mm 940 PRISM DIR+HAL WHITE DALI EM	59.4	7055	119	4000	>90	Yes	DALI	19
2071279	COLOSSAL 900mm 940 PRISM DIR+HAL WHITE SSA	59.4	7055	119	4000	>90	Yes	SylSmart Connected	19
2071280	COLOSSAL 900mm 940 PRISM DIR+HAL WHITE SSC	58.7	7055	120	4000	>90	Yes	SylSmart Standalone	19



Concord Colossal 1200

Ceiling surface and suspended



Product information

Code	Description	Fixture Power (W)	Luminous Flux (lm)	Efficacy (lm/W)	Colour Temp (K)	CRI	Dimmable	Control Technology	UGR
Concord Colossal 1200mm									
Opal diffuser Direct light distribution									
CRI80 Warm white (3000K)									
2071281	COLOSSAL 1200mm 830 OPAL DIR WHITE DALI	153.6	20,975	137	3000	>80	Yes	DALI	23
2071282	COLOSSAL 1200mm 830 OPAL DIR WHITE DALI EM	155.3	20,975	135	3000	>80	Yes	DALI	23
2071283	COLOSSAL 1200mm 830 OPAL DIR WHITE SSA	153.6	20,975	137	3000	>80	Yes	SylSmart Connected	23
2071284	COLOSSAL 1200mm 830 OPAL DIR WHITE SSC	153.6	20,975	137	3000	>80	Yes	SylSmart Standalone	23
CRI80 Neutral white (4000K)									
2071289	COLOSSAL 1200mm 840 OPAL DIR WHITE DALI	153.6	22,015	143	4000	>80	Yes	DALI	23
2071290	COLOSSAL 1200mm 840 OPAL DIR WHITE DALI EM	155.3	22,015	142	4000	>80	Yes	DALI	23
2071291	COLOSSAL 1200mm 840 OPAL DIR WHITE SSA	153.6	22,015	143	4000	>80	Yes	SylSmart Connected	23
2071292	COLOSSAL 1200mm 840 OPAL DIR WHITE SSC	153.6	22,015	143	4000	>80	Yes	SylSmart Standalone	23
CRI90 Neutral white (4000K)									
2071297	COLOSSAL 1200mm 940 OPAL DIR WHITE DALI	153.6	18,745	122	4000	>90	Yes	DALI	22
2071298	COLOSSAL 1200mm 940 OPAL DIR WHITE DALI EM	155.3	18,745	121	4000	>90	Yes	DALI	22
2071299	COLOSSAL 1200mm 940 OPAL DIR WHITE SSA	153.6	18,745	122	4000	>90	Yes	SylSmart Connected	22
2071300	COLOSSAL 1200mm 940 OPAL DIR WHITE SSC	153.6	18,745	122	4000	>90	Yes	SylSmart Standalone	22
Opal diffuser, Direct+Halo light distribution									
CRI80 Warm white (3000K)									
2071305	COLOSSAL 1200mm 830 OPAL DIR+HAL WHITE DALI	153.6	21,130	138	3000	>80	Yes	DALI	23
2071306	COLOSSAL 1200mm 830 OPAL DIR+HAL WHITE DALI EM	155.3	21,130	136	3000	>80	Yes	DALI	23
2071307	COLOSSAL 1200mm 830 OPAL DIR+HAL WHITE SSA	153.6	21,130	138	3000	>80	Yes	SylSmart Connected	23
2071308	COLOSSAL 1200mm 830 OPAL DIR+HAL WHITE SSC	153.6	21,130	138	3000	>80	Yes	SylSmart Standalone	23
CRI80 Neutral white (4000K)									
2071313	COLOSSAL 1200mm 840 OPAL DIR+HAL WHITE DALI	153.6	22,175	144	4000	>80	Yes	DALI	23
2071314	COLOSSAL 1200mm 840 OPAL DIR+HAL WHITE DALI EM	155.3	22,175	143	4000	>80	Yes	DALI	23
2071315	COLOSSAL 1200mm 840 OPAL DIR+HAL WHITE SSA	153.6	22,175	144	4000	>80	Yes	SylSmart Connected	23
2071316	COLOSSAL 1200mm 840 OPAL DIR+HAL WHITE SSC	153.6	22,175	144	4000	>80	Yes	SylSmart Standalone	23
CRI90 Neutral white (4000K)									
2071321	COLOSSAL 1200mm 940 OPAL DIR+HAL WHITE DALI	153.6	18,885	123	4000	>90	Yes	DALI	22
2071322	COLOSSAL 1200mm 940 OPAL DIR+HAL WHITE DALI EM	155.3	18,885	122	4000	>90	Yes	DALI	22
2071323	COLOSSAL 1200mm 940 OPAL DIR+HAL WHITE SSA	153.6	18,885	123	4000	>90	Yes	SylSmart Connected	22
2071324	COLOSSAL 1200mm 940 OPAL DIR+HAL WHITE SSC	153.6	18,885	123	4000	>90	Yes	SylSmart Standalone	22



Concord Colossal 1200

Ceiling surface and suspended



Product information

Code	Description	Fixture Power (W)	Luminous Flux (lm)	Efficacy (lm/W)	Colour Temp (K)	CRI	Dimmable	Control Technology	UGR
Concord Colossal 1200mm									
Prismatic diffuser, Direct light distribution									
CRI80 Warm white (3000K)									
2071285	COLOSSAL 1200mm 830 PRISM DIR WHITE DALI	117.5	15,735	134	3000	>80	Yes	DALI	19
2071286	COLOSSAL 1200mm 830 PRISM DIR WHITE DALI EM	118.7	15,735	133	3000	>80	Yes	DALI	19
2071287	COLOSSAL 1200mm 830 PRISM DIR WHITE SSA	120.0	15,735	131	3000	>80	Yes	SylSmart Connected	19
2071288	COLOSSAL 1200mm 830 PRISM DIR WHITE SSC	117.5	15,735	134	3000	>80	Yes	SylSmart Standalone	19
CRI80 Neutral white (4000K)									
2071293	COLOSSAL 1200mm 840 PRISM DIR WHITE DALI	117.5	16,510	141	4000	>80	Yes	DALI	19
2071294	COLOSSAL 1200mm 840 PRISM DIR WHITE DALI EM	118.7	16,510	139	4000	>80	Yes	DALI	19
2071295	COLOSSAL 1200mm 840 PRISM DIR WHITE SSA	120.0	16,510	138	4000	>80	Yes	SylSmart Connected	19
2071296	COLOSSAL 1200mm 840 PRISM DIR WHITE SSC	117.5	16,510	141	4000	>80	Yes	SylSmart Standalone	19
CRI90 Neutral white (4000K)									
2071301	COLOSSAL 1200mm 940 PRISM DIR WHITE DALI	117.5	14,060	120	4000	>90	Yes	DALI	19
2071302	COLOSSAL 1200mm 940 PRISM DIR WHITE DALI EM	118.7	14,060	118	4000	>90	Yes	DALI	19
2071303	COLOSSAL 1200mm 940 PRISM DIR WHITE SSA	120.0	14,060	117	4000	>90	Yes	SylSmart Connected	19
2071304	COLOSSAL 1200mm 940 PRISM DIR WHITE SSC	117.5	14,060	120	4000	>90	Yes	SylSmart Standalone	19
Prismatic diffuser, Direct+Halo light distribution									
CRI80 Warm white (3000K)									
2071309	COLOSSAL 1200mm 830 PRISM DIR+HAL WHITE DALI	117.5	15,880	135	3000	>80	Yes	DALI	19
2071310	COLOSSAL 1200mm 830 PRISM DIR+HAL WHITE DALI EM	118.7	15,880	134	3000	>80	Yes	DALI	19
2071311	COLOSSAL 1200mm 830 PRISM DIR+HAL WHITE SSA	120.0	15,880	132	3000	>80	Yes	SylSmart Connected	19
2071312	COLOSSAL 1200mm 830 PRISM DIR+HAL WHITE SSC	117.5	15,880	135	3000	>80	Yes	SylSmart Standalone	19
CRI80 Neutral white (4000K)									
2071317	COLOSSAL 1200mm 840 PRISM DIR+HAL WHITE DALI	117.5	16,665	142	4000	>80	Yes	DALI	19
2071318	COLOSSAL 1200mm 840 PRISM DIR+HAL WHITE DALI EM	118.7	16,665	140	4000	>80	Yes	DALI	19
2071319	COLOSSAL 1200mm 840 PRISM DIR+HAL WHITE SSA	118.7	16,665	140	4000	>80	Yes	SylSmart Connected	19
2071320	COLOSSAL 1200mm 840 PRISM DIR+HAL WHITE SSC	117.5	16,665	142	4000	>80	Yes	SylSmart Standalone	19
CRI90 Neutral white (4000K)									
2071325	COLOSSAL 1200mm 940 PRISM DIR+HAL WHITE DALI	117.5	14,190	121	4000	>90	Yes	DALI	19
2071326	COLOSSAL 1200mm 940 PRISM DIR+HAL WHITE DALI EM	118.7	14,190	120	4000	>90	Yes	DALI	19
2071327	COLOSSAL 1200mm 940 PRISM DIR+HAL WHITE SSA	120.0	14,190	118	4000	>90	Yes	SylSmart Connected	19
2071328	COLOSSAL 1200mm 940 PRISM DIR+HAL WHITE SSC	117.5	14,190	121	4000	>90	Yes	SylSmart Standalone	19

Code	Description
Accessories - Suspended	
Mechanical accessories	
2071091	COLOSSAL CEILING ROSE
2071092	COLOSSAL CEILING ROSE + SUSPENSION KIT 400/600MM
Electrical Connection	
2071094	COLOSSAL 3CORE POWER CABLE 6M TRANSPARENT
2071095	COLOSSAL 5CORE POWER CABLE 6M TRANSPARENT



Colossal Ceiling Rose




Suspension Kit 400/600mm


Concord Colossal surface wall & suspended




Photometric Data




400mm Opal




400mm Prismatic




600mm Opal



600mm Prismatic




900mm Opal



900mm Prismatic







1200mm Opal



1200mm Prismatic



Dimensions (mm)

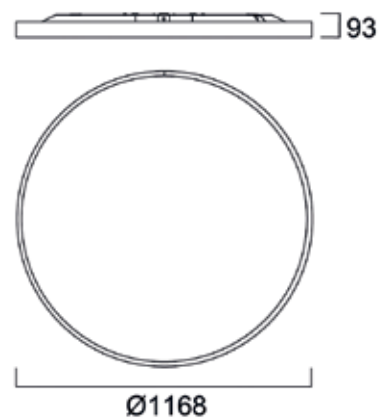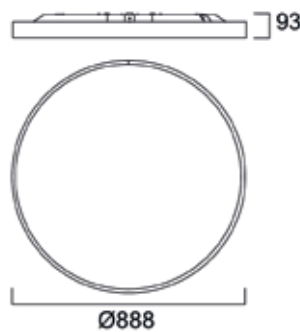

Concord

by **SYLVANIA**



Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania International Group Kft.

Copyright Feilo Sylvania International Group Kft. March 2022

sylvania-lighting.com

A Feilo Sylvania Company